



Digital Signage and Content Management Services



MAXHUB seeWO OSTECH

Goodview Partnering with Goodview Digital Signage Co.

Contents

Digital Signage Basic Series	02
Digital Signage Pro Series	04
Digital Signage PCAP Series	06
Video Wall Series	08
Moveable A-Frame Series	10
Double-side Window Display Series	12
Freestanding Display Series	14
Elevator Screen Series	16
OLED Transparent Display Series	18
Hight Brightness Screen Series	20
Media Player Series	22
Digital Frame Series	24
SaaS Cloud Server Series	26




Digital Signage Basic Series

Size : 22、24、32、43、50、55 inch



Parameters


Model	M24FAH	M32FAQ	M43FUT	M43FUH	M50FUH	M55FUH
Display	23.8 inches LED Backlight	31.51 inches LED Backlight	42.5 inches LED Backlight	42.5 inches LED Backlight	50 inches LED Backlight	54.64 inches LED Backlight
Display Area (in)	20.73 × 11.65	27.50 × 15.47	37.05 × 20.84	37.05 × 20.84	43.14 × 24.27	47.62 × 26.79
Dimension (in)	22.05 × 14.37 × 1.61	28.20 × 16.34 × 1.81	37.68 × 21.57 × 3.47	37.68 × 21.54 × 2.52	43.92 × 25.05 × 1.83	48.50 × 27.91 × 1.98
Weight (lb)	GW 17.2, NW 12.6	GW 23.8, NW 18.7	GW 23.3, NW 17.8	GW 40.2, NW 33.8	GW 45.0, NW 35.8	GW 54.3, NW 42.9
Brightness	700cd/m ²	700cd/m ²	700cd/m ²	700cd/m ²	700cd/m ²	700cd/m ²
Response Time	14ms	14ms	14ms	14ms	14ms	14ms
VESA	100 x 100, Desktop VESA	100 x 100, Desktop VESA	100 x 00, Desktop VESA	100 x 100, Desktop VESA	100 x 100, Desktop VESA	100 x 100, Desktop VESA
CPU	T972-SR Quad-Core A55 1.9GHz					
Memory	2GB					
Storage	8GB					
OS	Android 9.0					
Speaker	2 × 2W 4Ω		2 × 2W 4Ω	2 × 2W 4Ω	2 × 2W 4Ω	2 × 2W 4Ω
Interfaces	USB. LAN.WAN.					
Resolution	1920×1080		1920×1080	1920×1080	1920×1080	1920×1080
Contrast Ratio	1000:1		1000:1	1000:1	1000:1	1000:1
View Angle	89°(U/D/L/R)		89°(U/D/L/R)	89°(U/D/L/R)	89°(U/D/L/R)	89°(U/D/L/R)
Color Depth	8bit, 16.7 Million Colors		8bit, 16.7 Million Colors	8bit, 16.7 Million Colors	8bit, 16.7 Million Colors	8bit, 16.7 Million Colors
Timing	Multiple time period scheduled power on/off					
Orientation	Landscape		Landscape		Portrait. Landscape	
Response Time				30000 Hrs		
CMS	White			Saas CMS		
Color				Black		

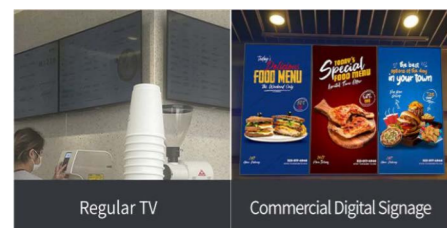

Regular TV Commercial Digital Signage


High Brightness, High Fidelity Video Footage

Original commercial IPS panel with high brightness to show true colors in indoor environment



Support Both Landscape and Portrait Mode

Unique front-frameless design brings variety combination possibilities

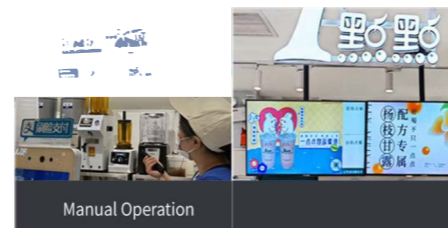

Manual Operation

Plug and Play, default signal channel setable

No TV boot screens. Support automatic identification of signal sources and custom selection of start-up channels



Support 16/7

Life time ≥ 50000 hours, support 16/7 to fit the demand for extended operation hours in various business environments



Split screen intelligently for partitions.

Supports splitting screens to different partitions in horizontal or vertical formats, allowing users to allocate space more flexibly for each content partitions



Built-in CMS software

It has a built-in content management system that allows users to edit and play content, enabling them to manage it easily and efficiently

Application Case





Digital Signage Pro Series

Size: 43、55、65、75、86、98 inch

Parameters

Model	M43GUQ	M55GUQ	M65GUQ
Dimension (in)	43	55	65
Resolution	3840 × 2160	3840 × 2160	3840 × 2160
Display Area (in)	37.05 × 20.84	500 cd/m ²	56.24 × 35.18 × 57.61
Brightness		89° (U/D/L/R)	
View Angle		50000 Hours	
Working Life		47.62 x 26.79	
Battery Life		7 x 24 hours	
HDMI Output		1 (HDMI Daisy chain, Up to 3*3)	
RS232		1	
USB Type-C		1 (DP1.2, PD 65W, Network Sharing(100M))	
System		Android 11	
RAM		4GB	
ROM		32GB	
Contrast Ratio	5000	4000	1200
Dimensions (in)	37.98 × 21.75 × 2.81	48.54 × 27.70 × 2.81	57.61 × 32.99 × 3.01
Sound	2 x 10W	2 x 10W	2 x 10W
VESA (in)	7.87 x 7.87	15.75 x 7.87	23.62 x 15.75
Power Supply		100-240V-50/60Hz	
Power		≤0.5W	
Operation Temperature		0° - 40° C	
Operating Humidity		10% - 90%	
Color		Black	



AI PQ adjustment

AI PQ Scene Recognition auto-adjusts picture quality for truer-to-life color and image detail



High haze rate with anti-glare

Anti-glare display with 25% haze rate, frame drifting function to prevent screen burn-in and protect against screen damage caused by long term static image



Support 24/7

Original commercial IPS LCD panel, support 24/7 to fit the demand for extended operation hours in various business environments



Plug and Play, default signal channel settable

No TV boot screens. Support automatic identification of signal sources and custom selection of startup channels



Built-in CMS



It has a built-in content management system that allows users to edit and play content, enabling them to manage it easily and efficiently




Even ultra narrow bezel

Ultra narrow bezel with metal texture craft shows the fashionable and modern style

Application Case

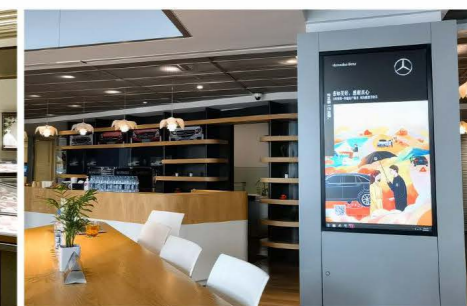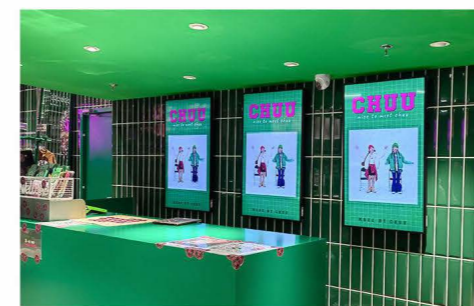

Model	M75GUQ	M86GUQ	M98GUQ
Dimension (in)	75	86	98
Resolution	3840 × 2160	3840 × 2160	3840 × 2160
Display Area (in)	64.95 × 36.53	74.61 × 41.97	84.99 × 47.81
Brightness		500 cd/m ²	
View Angle		178°	
Working Life		50000 Hours	
Battery Life		7 x 24 hours	
HDMI Output		1 (HDMI Daisy chain, Up to 3*3)	
RS232		1	
USB Type-C		1 (DP1.2, PD 65W, Network Sharing (100M))	
System		Android 11	
RAM		4GB	
ROM		32GB	
Contrast Ratio		1200	
Dimensions (in)	66.36 × 37.94 × 3.21	76.02 × 43.38 × 3.21	87.12 × 49.94 × 3.13
Sound	2 x 10W	2 x 10W	2 x 10W
VESA (in)	31.50 x 15.75	31.50 x 23.62	31.50 x 23.62
Power Supply		100-240V-50/60Hz	
Power		≤0.5W	
Operation Temperature		0° - 40° C	
Operating Humidity		10% - 90%	
Color		Black	

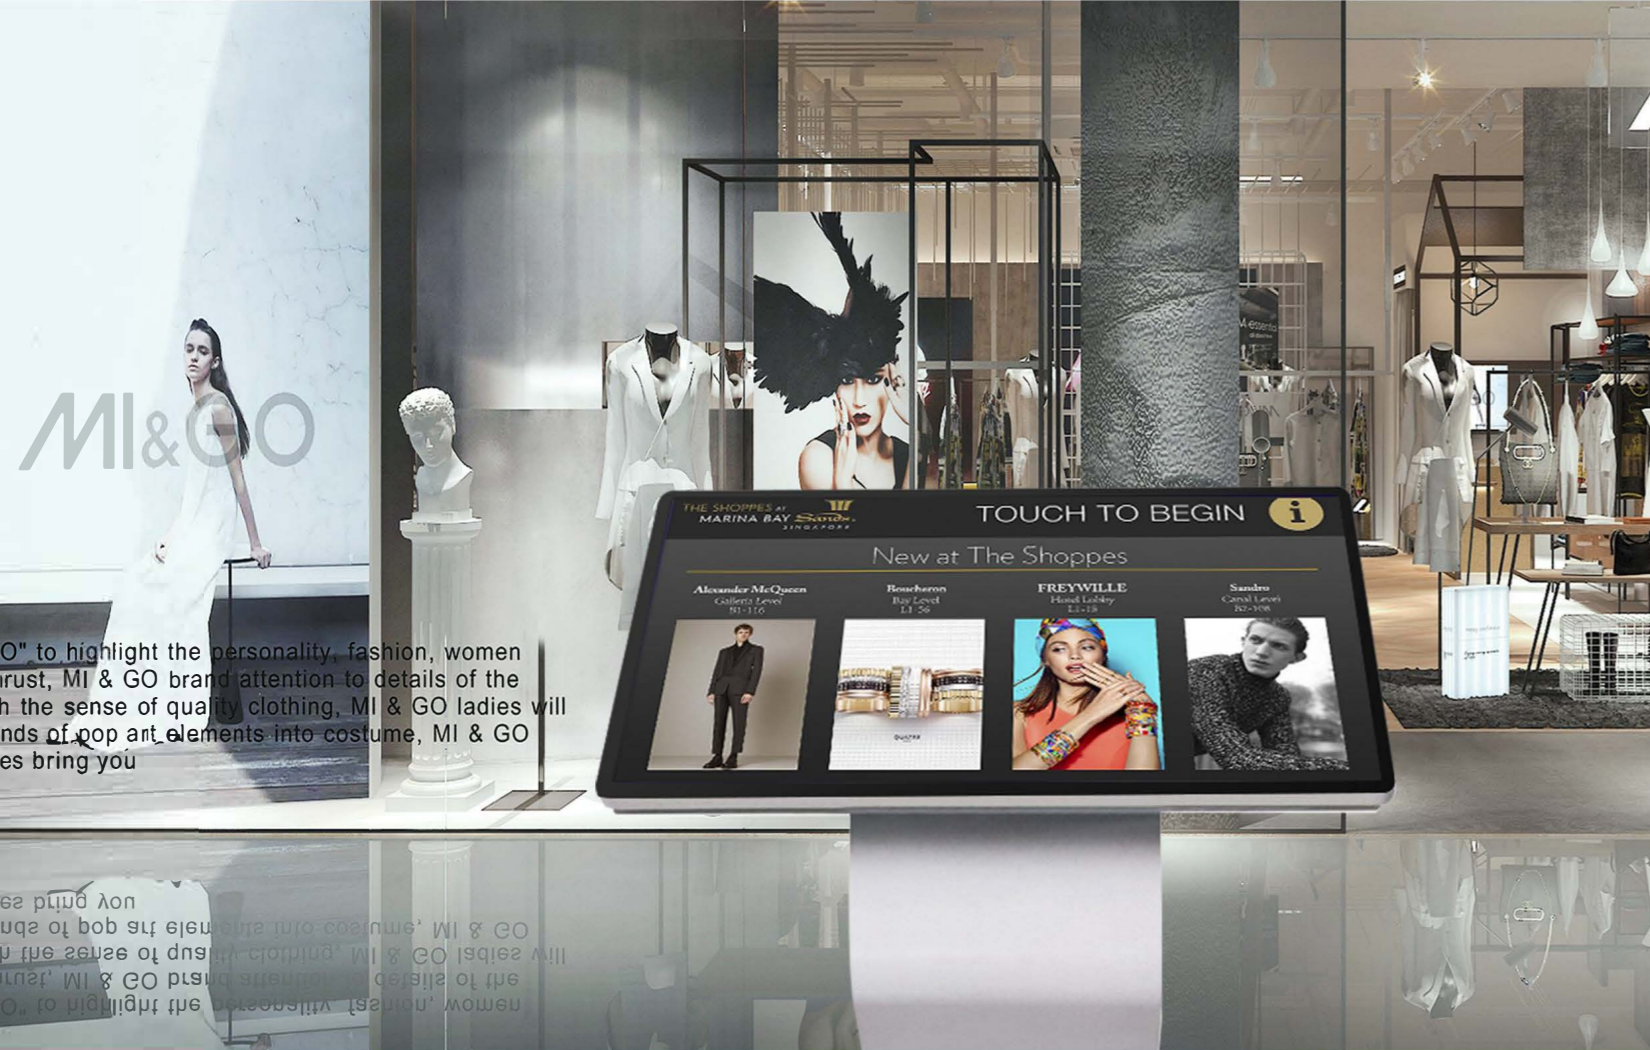

Digital Signage PCAP Series

Size: 22、27、32、43、55 inch




10-point high-precision capacitive touch

Precise contact, fast response, screen without water ripple, with dynamic image clarity technology



Original commercial IPS panel

Can highly restore the picture color, viewing angle is wide, even if different angles to enjoy the same visual effect

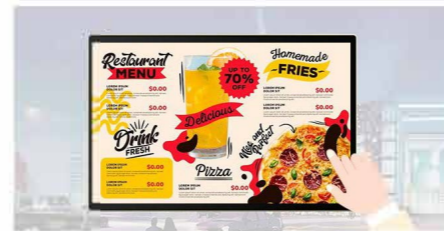


Split screen intelligently for partitions

Compatible with multiple content formats combined with split screen playback, allowing users to allocate space more flexibly for each content partitions



High-end configuration, full compatibility

Support network publishing and U disk local playback, plug and play, display information as you wish

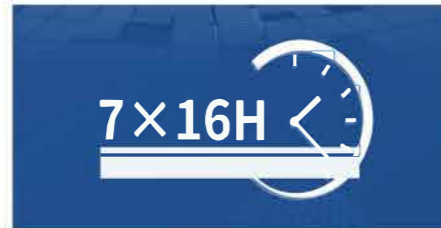

Support 16/7, Timed switch on/off

Support sleep/wake function, suitable for all-weather operation of commercial stores and airports, stations and other public occasions



Built-in interactive content creation and publishing software


Support custom creation, video images, scrolling subtitles, weather and other forms of touch interactive content production and publishing



Parameters

Model	TC22H1	TC27H1	TC32H1	TC43H1	TC55H1
Display	22 inches LED Backlight	27 inches LED Backlight	32 inches LED Backlight	42.51 inches LED Backlight	54.64 inches LED Backlight
Display Area (in)	18.70 × 10.49	23.50 × 13.20	27.46 × 15.43	37.02 × 20.80	47.58 × 26.75
Dimension (in)	20.85 × 12.64 × 1.67	25.59 × 15.30 × 1.79	29.83 × 17.81 × 1.94	39.28 × 23.06 × 2.05	50.20 × 29.36 × 2.24
Weight (lb)	GW 17.9, NW 13.5	GW 23.2, NW 18.5	GW 29.1, NW 22.7	GW 46.3, NW 37.5	GW 81.4, NW 64.8
Brightness	250cd/m ²	300cd/m ²	400cd/m ²	450cd/m ²	450cd/m ²
Response Time	14ms	14ms	8ms	8ms	9ms
VESA (in)	15.75 × 7.87				
CPU	RK3288 GHz ARM Cortex A17 (1.6GHz)				
Memory	2GB				
Storage	8GB				
OS	Android 7.1				
Resolution	1920 x 1080				
Contrast Ratio	16:9				
Contrast Ratio	1000:1	1000:1	1200:1	1200:1	1200:1
Speaker	Stereo 2 × 2W 4Ω				
Play Mode	Landscape, Portrait, Split Display, Play List				
Hanging Mode	Horizontal / Vertical Wall Plate / VESA Mounting				
Touch Type	Capacitive				
Touch Point	10 Point				
Communication	USB, LAN, WAN				
Timing	Multiple time period scheduled power on/off				
Color	Aluminum Alloy Frame + Black Shell				

Application Case

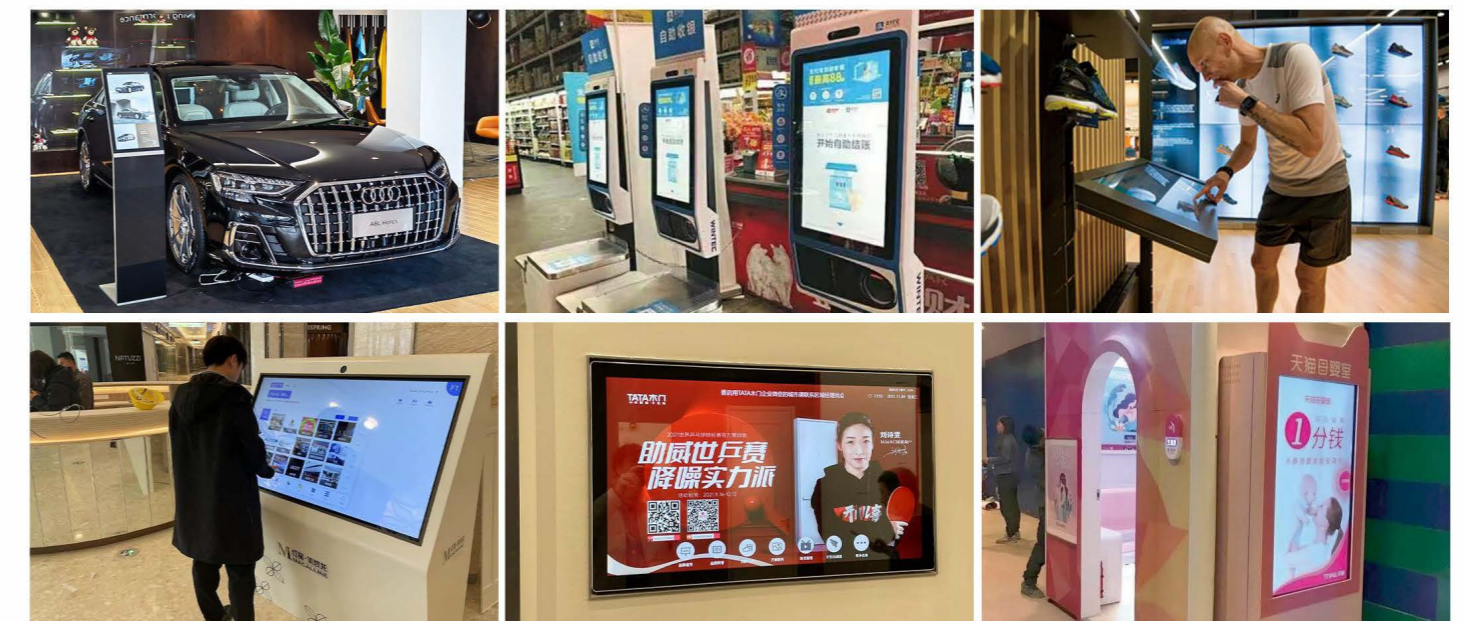




Tap into your Inner Creative Genius

How to Find new, groundbreaking ideas and inspirations from the world around you

Video Wall Series

Size: 46、49、55 inch

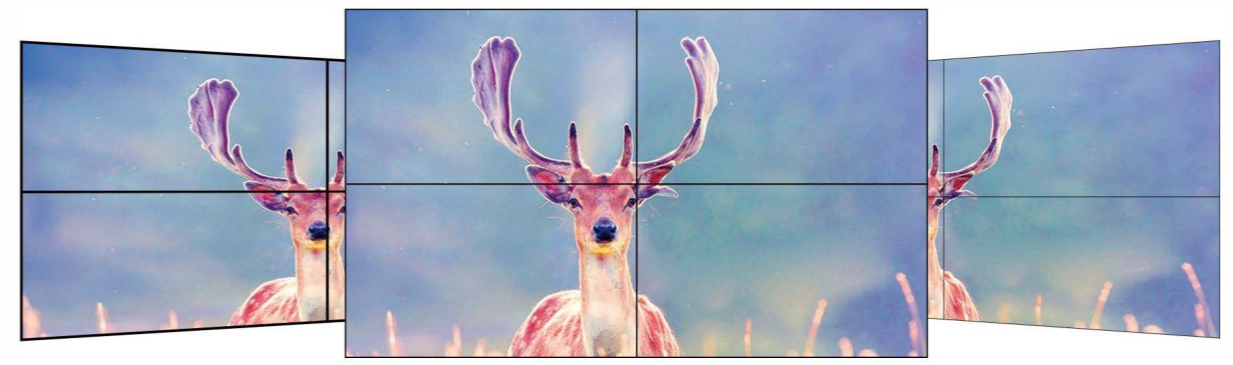

3.5mm piece

1.8mm piece

0.88mm piece

Parameters

Model	PD46YS14	PD49YS14	PD55YS14	PD55N10	PD55NP
Display	46 inches LED Backlight	49 inches LED Backlight	55 inches LED Backlight	55 inches LED Backlight	55 inches LED Backlight
Piece	0.14	0.14	0.14	0.07	0.03
Display Area (in)	40.08 × 22.55	42.25 × 23.79	47.62 × 23.93	47.62 × 26.79	47.62 × 26.79
Dimension (in)	40.23 × 22.69 × 3.52	42.42 × 23.93 × 3.36	47.72 × 26.89 × 4.62	47.72 × 26.89 × 4.62	47.62 × 26.82 × 4.73
Weight (lb)	GW 59.6, NW 25.4	GW 60.4, NW 25.8	GW 80.5, NW 35.7	GW 107.0, NW 48.5	GW 99.2, NW 44.1
Brightness	500cd/m ²				
Response Time	8ms				
Master Chip	TSUMV53RWU-Z1	TSUMV53RWU-Z1	TSUMV53RWU-Z1	TSUMV53RWU-Z1	TSUMV53RWU-Z1
Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Contrast Ratio	1200:1	1200:1	1300:1	1000:1	1100:1
View Angle	89° (U/D/L/R)	89° (U/D/L/R)	89° (U/D/L/R)	89° (U/D/L/R)	89° (U/D/L/R)
Color Depth	8bit, 16.7 Million Colors	8bit, 16.7 Million Colors	8bit, 16.7 Million Colors	10bit, 16.7 Million Colors	10bit, 16.7 Million Colors
Orientation	Landscape / Portrait				
OSD Language	Chinese/English				
CMS	Screencontrol				
Border Color	Black				



Original industrial IPS hard screen, super wide color gamut

IPS high brightness commercial splicing screen, support more than 4K ultra-high resolution splicing, fine picture, color realistic



Dynamic compensation, 3D noise reduction

3D picture quality digital processing circuit with dynamic compensation, 3D noise reduction function, can effectively prevent screen burning phenomenon



Multiple sizes, multiple bezels available

Provide 0.88mm, 1.8mm, 3.5mm bezel, and 46", 49", 55" and other specifications to meet different scenes of application options



Intelligent split screen

Arbitrary division, combination, roaming, etc., support a variety of split-screen mode, so that limited space to show more details



Anti-glare special surface treatment


Removing residual image, the picture is not distorted



Provide door-to-door installation service

From production to installation, the whole process of one-to-one professional cooperation, so that customers in the purchase to save heart and effort, no worries

Application Case

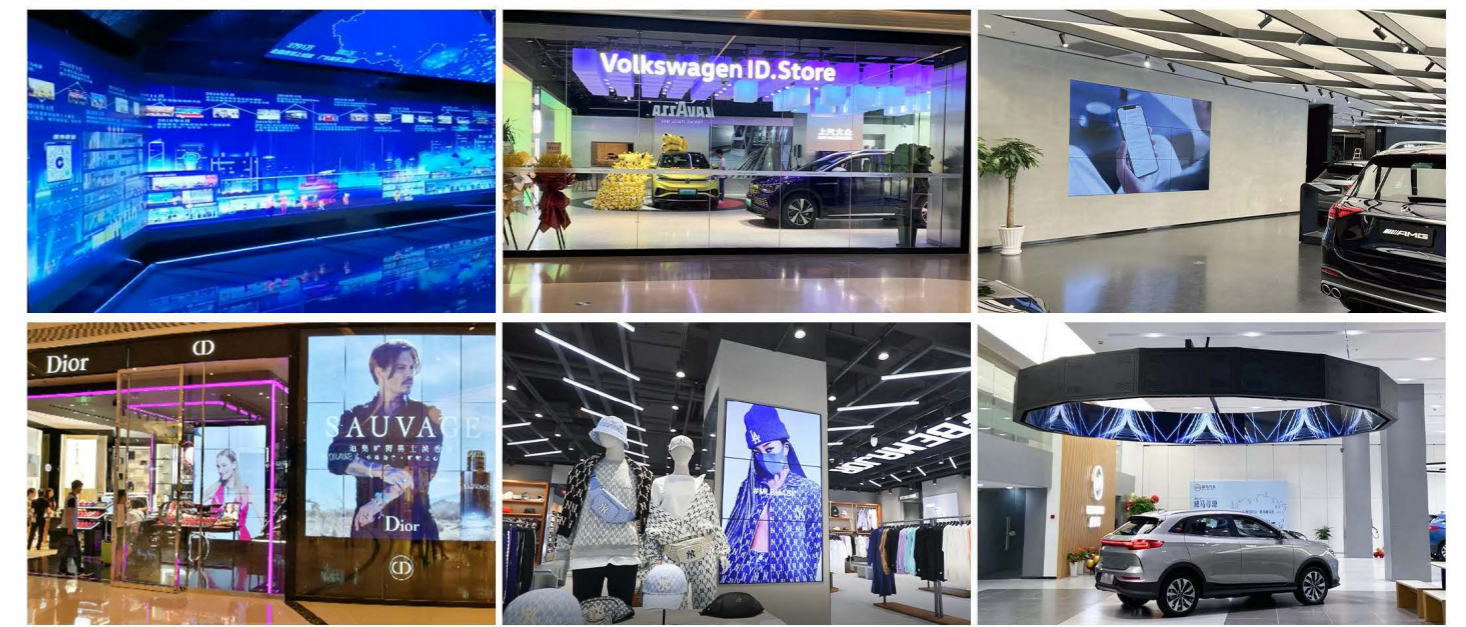



Moveable A-Frame Series

Size: 43 inch



Free dragging, no "line" binding

Configuration with 50AH high-density lithium battery, up to 12 hours of endurance, promotional free display, for the sales of elegant speed



Support 16/7

Original commercial IPS LCD panel, support 16/7 to fit the demand for extended operation hours in various business environments



IP65 protection level

With IP65 level of splash and water resistance, no fear of wind, dust and water immersion against complex outdoor environment without pressure



700&1500cd/m² brightness

Can automatically adjust the screen brightness according to changes in ambient light to meet the needs of different external lighting conditions require different brightness levels



Built-in CMS

It has a built-in content management system that allows users to edit and play content, enabling them to manage it easily and efficiently



Dual stereo surrounded sound


The product is equipped with an integrated dual stereo surrounded sound. The sound moves with the light and shadow to produce a better advertising effect



Parameters

Model	PF43HL1	PF43HL3
Display	42.51 inches LED Backlight	
Display Area (in)	37.13 × 20.92	
Dimension (in)	23.81 × 47.04 × 18.82	
Carton Size (in)	56.30 × 29.65 × 25.31	
Weight (lb)	GW 118.9 (with pallet), NW 84.0	GW 133.4 (with pallet), NW 98.6
Brightness	700cd/m ²	1500cd/m ²
Installation	Floor-Standing	
Contrast Ratio	1000:1	1200:1
Product Power	73 W	121 W
Audio/Video Interface	Video: Video formats such as MPEG1/MPEG2/MPEG4/AVI/WMV/MKV/TS/FLV; Audio: MP3 and other audio formats; Image: JPG/ JPEG/BMP/PNG and other image formats; Text: TXT	
IP Waterproof Grade	IP65	
Standby Time	10-12Hrs	
Color	Black/White	
Resolution	1920 x 1080	
Contrast Ratio	9:16	
Color	8bit, 16.7 Million Colors	
CPU	RK 3288W Quad Core ARM Cortex A17 (up to 1.6GHz)	
OS	Android 7.1	
Power Supply	AC-100-240V	
Hanging Mode	Floor-Standing	
Response Time	12ms	13ms
View Angle	89° (U/D/L/R)	
Language	Chinese/English	
Working Environment	0-40°C 10%-80% %RH	


Application Case

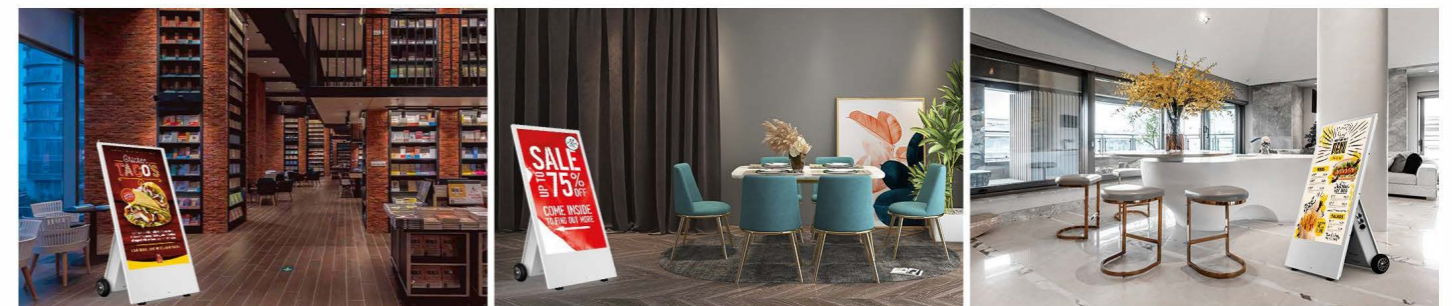




Double-side Window Display Series

Size: 43, 55 Inch

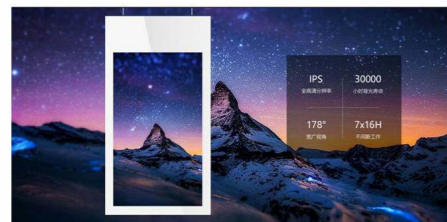

IPS LCD panel

High brightness, high saturation display, ultra-long service life, 178° wide viewing angle, so you can enjoy the feast of perspective

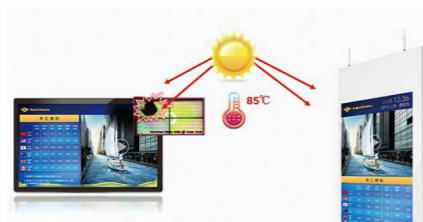

High temperature work

Industrial-grade high-temperature LCD, high-temperature work without black spots, no residual images on the screen for a long time, LCD does not sink, no yellow spots



Built-in CMS

Support network, USB and other content distribution methods, cloud production and distribution, to achieve unified, convenient and efficient management of promotional content across regions



Double-sided same display/different display

Double-sided different brightness, support double-sided different display, suitable for windows and other double-sided display application scenarios




Support 16/7

Original commercial IPS LCD panel, support 16/7 to fit the demand for extended operation hours in various business environments



Split screen intelligently for partitions

Compatible with multiple content formats combined with split screen playback, allowing users to allocate space more flexibly for each content partitions

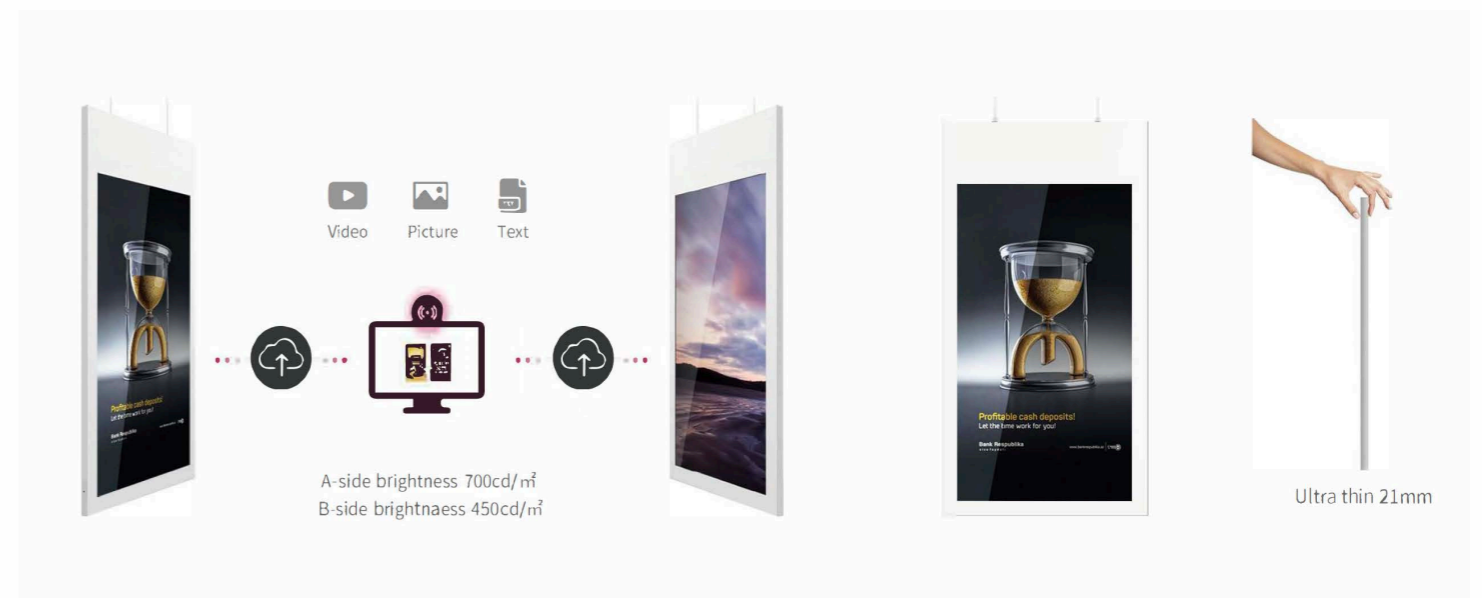

Parameters

Model	D43H1	D55H1
Display	43 inches LED Backlight	54.64 inches LED Backlight
Display Area (in)	20.84 × 37.04	26.79 × 47.62
Dimension (in)	24.98 × 46.39 × 0.85	32.17 × 58.24 × 0.85
Carton Size (in)	29.51 × 50.98 × 6.38	36.73 × 62.84 × 6.38
Weight (lb)	GW 49.6, NW 34.4	GW 77.2, NW 57.3
Brightness	700&450cd/m ²	550&450cd/m ²
Resolution	1920 X 1080	
CPU	RK 3288 Quad Core ARM Cortex A17 (up to 1.6GHz)	
GPU	Quad core ARM Mali-764	
Memory	2GB	
Storage	16GB	
Color Depth	Android 7.1	
Orientation	Portrait	
Response Time	8ms	
Contrast Ratio	1200:1	
Color	White	
Playback Mode	Portrait, Split display, Play List	
Watch Dog	Support	
Communication	USB, LAN, WAN	
Power Supply	AC-100-240V (50/60Hz)	
Timing	Multiple time period scheduled power on/off	
CMS	Saas CMS	
Language	Chinese/English	
Working Environment	0-40°C 10%-80% RH	

Application Case





Freestanding Display Series

Size: 49、55、65 inch




10-point high-precision capacitive touch

Precise contact, fast response, screen without water ripple, with dynamic image clarity technology



Original commercial IPS panel

Can highly restore the picture color, viewing angle is wide, even if different angles to enjoy the same visual effect

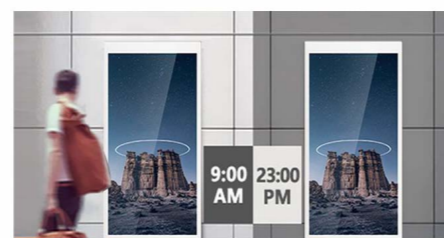

Support 16/7, Timed switch on/off

Support sleep/wake function, suitable for all-weather operation of commercial stores and airports, stations and other public occasions




High-end configuration, full compatibility

Support network publishing and U disk local playback, plug and play, display information as you wish




One key lockscreen, secure and controllable

One key lock function, after opening the remote control, USB, mouse, etc. are locked to prevent unauthorized operation of unauthorized personnel in public places

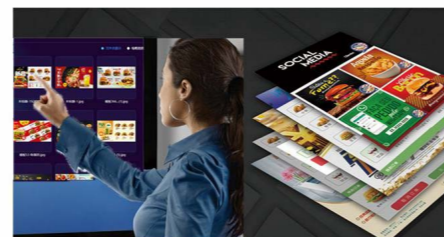

Built-in interactive content creation and publishing software


Support custom creation, video images, scrolling subtitles, weather and other forms of touch interactive content production and publishing

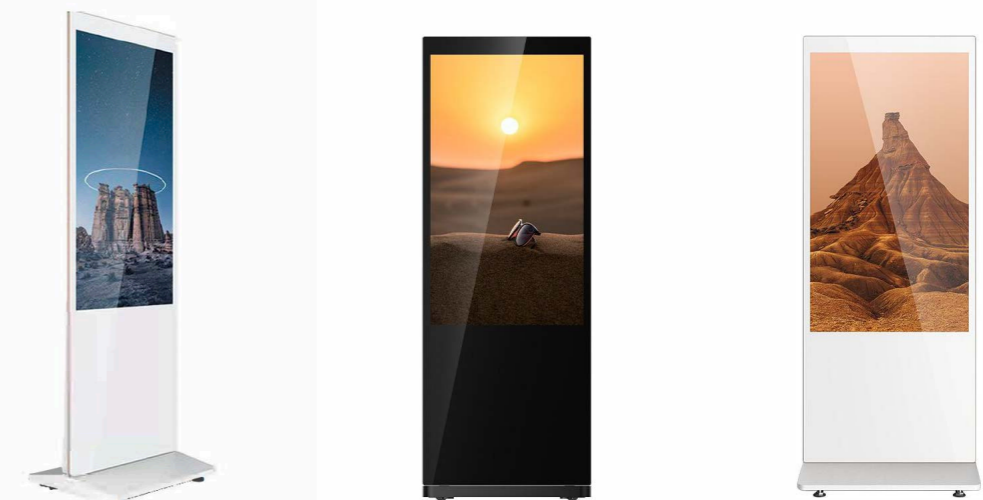

Parameters

Model	L49H10	L55H10	L65H10	L49H10C	L55H10C
Display	49 inches LED Backlight	54.64 inches LED Backlight	65.41 inches LED Backlight	49 inches LED Backlight	54.64 inches LED Backlight
Display Area (in)	42.24 × 23.74	47.66 × 26.83	56.20 × 31.59	42.24 × 23.74	47.66 × 26.83
Dimension (in)	72.56 × 26.20 × 1.62	75.26 × 29.29 × 1.62	82.99 × 34.79 × 3.65	73.63 × 26.20 × 1.62	76.32 × 29.29 × 1.62
Weight (lb)	GW 172.0, NW 127.9	GW 205.0, NW 153.2	GW 224.9, NW 202.9	GW 172.0, NW 127.9	GW 205.0, NW 153.2
Brightness	400cd/m ²	530cd/m ²	500cd/m ²	400cd/m ²	530cd/m ²
Contrast Ratio	1200:1	1300:1	1200:1	1200:1	1300:1
Response Time	8ms	9ms		8ms	8ms
CPU	RK3288 GHz ARM Cortex A17(1.6GHz)		RK3399 Six Core 64 bit (1.8GHz)		RK3288 GHz ARM Cortex A17(1.6GHz)
Memory	2GB		4GB		2GB
Storage	8GB		32GB		8GB
OS	Android 7.1				
Touch Type	NO			Capacitive	
Touch Point	NO			10 Point	
Frame Response	NO			<15ms	
Input Method	NO			Fingers, touch pens and other opaque objects	
Orientation	Portrait				
Speaker	Stereo 2 x 10W 4Ω				
Play Mode	Playlist, multi windows play, column play				
Smart Volume	Time-sharing volume				
Timing	Multiple time period scheduled power on/off				
Communication	USB, LAN, WAN				
INPUT VOLTAGE	AC-110-240V (50/60Hz)				
View Angle (CR>10)	89° (U/D/L/R)				
Installation	Floor-Standing				
CMS	Saas CMS				
Backlight Life	15000Hrs	30000Hrs	30000Hrs	30000Hrs	30000Hrs
Multimedia	Video: MPEG1/MPEG2/MPEG4/AVI/WMV/MKV/TS/FLV and other video formats; Audio: MP3 and other audio formats; Image: JPG/JPEG/BMP/PNG/GIF and other image formats; Text: TXT				
Working Environment	0-40°C 10%-80% RH				
Watch Dog	Support				
Color	white with gold aluminum frame / black with silver aluminum frame				


Application Case

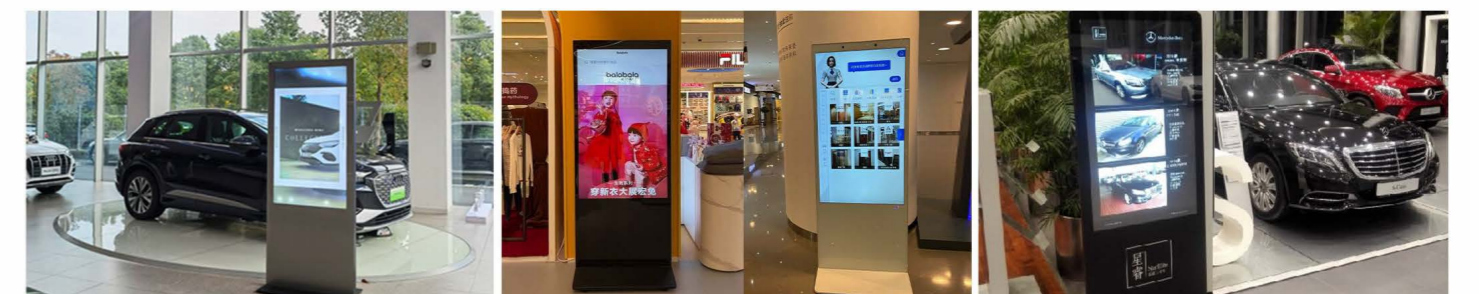



OLED Transparent Display

Size: 55 inch non touch model, 55 inch touch model

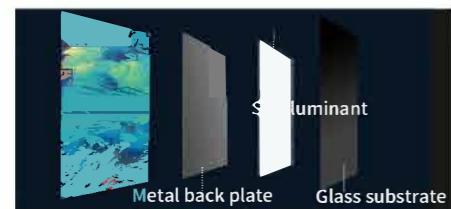

Self-illuminating technology with wider viewing angle and limitless contrast

Self-illuminated pixels can show pure black, and the ultra-high contrast ratio accurately reproduces the color of the picture



Ultra high transparency

Accurate performance screen 38% high transparency to achieve the effect of ordinary screen can not be achieved, better integration into a variety of spatial scenes




AR effect in the dark

Stunning picture quality in the dark, displaying content that looks lifelike and gives the viewer an immersive experience



Perfect color expression

OLED transparent screen color gamut range of 120%, compared to traditional displays more colorful, higher brightness and color performance.

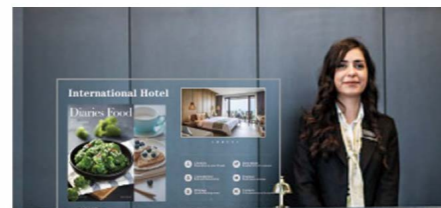

Asthis drawing paper, hidden in invisible

The slim and lightweight design breaks through the traditional display play form and broadens the application of the traditional display



Support extended splicing design

OLED transparent screen support horizontal or vertical display, support extended splicing, wireless extension, to meet a variety of visual art space design needs.



Parameters

Model	PD55NT	M24FAH	PD55NTC
Display		55 inches LED	
Display Area(mm)		47.62 × 26.79	
Touch	No		10-point capacitive touch
Brightness		400cd/m ²	
Product Power		192W	
Backlight Life		30000Hrs	
Product Color		Silver Gray	
Resolution		1920 x 1080	
Contrast Ratio		16:09	
View Angle		178° (U/D/L/R)	
Color		10bit, 1.07B Colors	
Contrast Ratio		150000:1	
Screen Hanging Mode		Horizontal/Vertical	
Response Time		1ms	
Language		English	
Color Temperature		9300K	
Power Supply		AC-100-240V (50/60Hz)	
Audio/Video Interface		HDMI x 3, IR, Audio Output, DP, DP Output, RS232, RS232 Output	
Working Environment		Temperature 0-45°C, Humidity 10-90%	
Storage Environment		Temperature -20-60°C, Humidity 10-90%	



LCD VS OLED Signage Display

Application Case





Elevator Screen Series

Size: 19、32 inch



Status monitoring, one-touch alarm

Support the one-key alarm function, when the elevator fails, the trapped person can click the alarm button of the terminal equipment to contact the emergency rescue personnel in the first time




Visual Intercom

Support visual intercom function, rescuers can directly initiate video intercom with the digital signage terminal in the accident elevator through the background, and can start video calls



Built-in CMS software, Support remote audio and video distribution

Remote network management, supporting videos, pictures, web pages, etc. Interactive program editing, time slot program preset, seamless switching at intervals are available

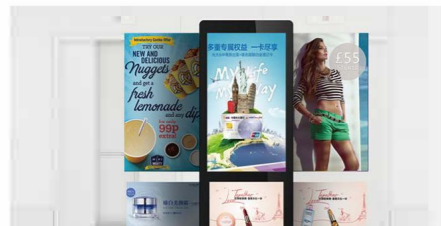


Multi-Screen Disparate Display

Support custom split screen, screen area can be arbitrarily divided, horizontal and vertical screens can be arbitrarily combined, support the composite use of touch query and interaction, to achieve diversification of operational functions



Support custom NFC function

When phone nears the screen, users can get detailed information, which support guiding the formation of real consumption and improving the conversion rate of advertising

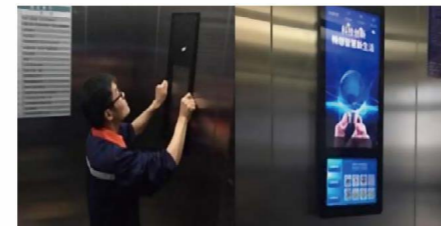

Media and property operate on the same platform


Managing the same platform separately, the media company is responsible for the operation of advertisements, and the property for the maintenance of elevator public welfare content




Parameters

Model	PF19EH7	PF32EH6
Display	18.5+10.1 inches LED Backlight	31.51+18.5 inches LED Backlight
Display Area (in)	16.09 X 9.03/5.29 X 8.49	27.50 X 15.47/16.13 X 9.07
Dimension (in)	10.79 X 25.20 X 1.16	40.94 X 18.50 X 1.97
Carton size (in)	28.66 X 16.30 X 4.17	46.65 X 24.80 X 7.68
Weight (lb)	GW 12.2, NW 10.0	GW 47.4, NW 40.2
Brightness	225/225cd/m ²	400/250cd/m ²
Resolution	1366 X 768/1280 X 800	1080 X 1920/1366 X 768s
Other interfaces	USB 2.0 (TypeA) x 1	
CPU	RK 3288 GHz ARM Cortex A17 (Highest1.8GHz)	
GPU	GHz ARM Mail-764	
Memory	2GB	
Storage	8GB	
Color Depth	8bit, 16.7 Million Colors	
Camera (optional)	/	/
Installation		Hanging Plate
Color	White	Black
Language	Chinese/English	
Service life	30000Hrs	
Watchdog Reset Function	Support	
Hanging mode	Vertical	
Supply Power	DC 12V	DC 12V
work Environment	0-40°C 10% - 85%RH No Condensation	

Application Case

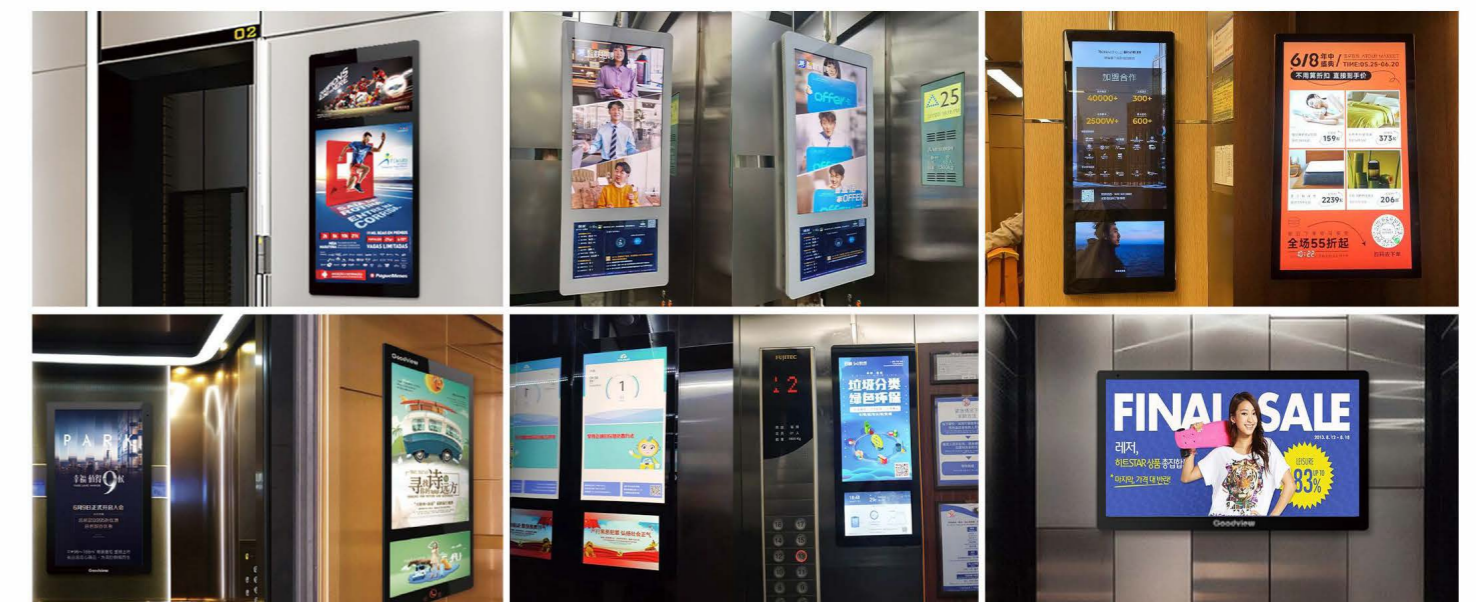

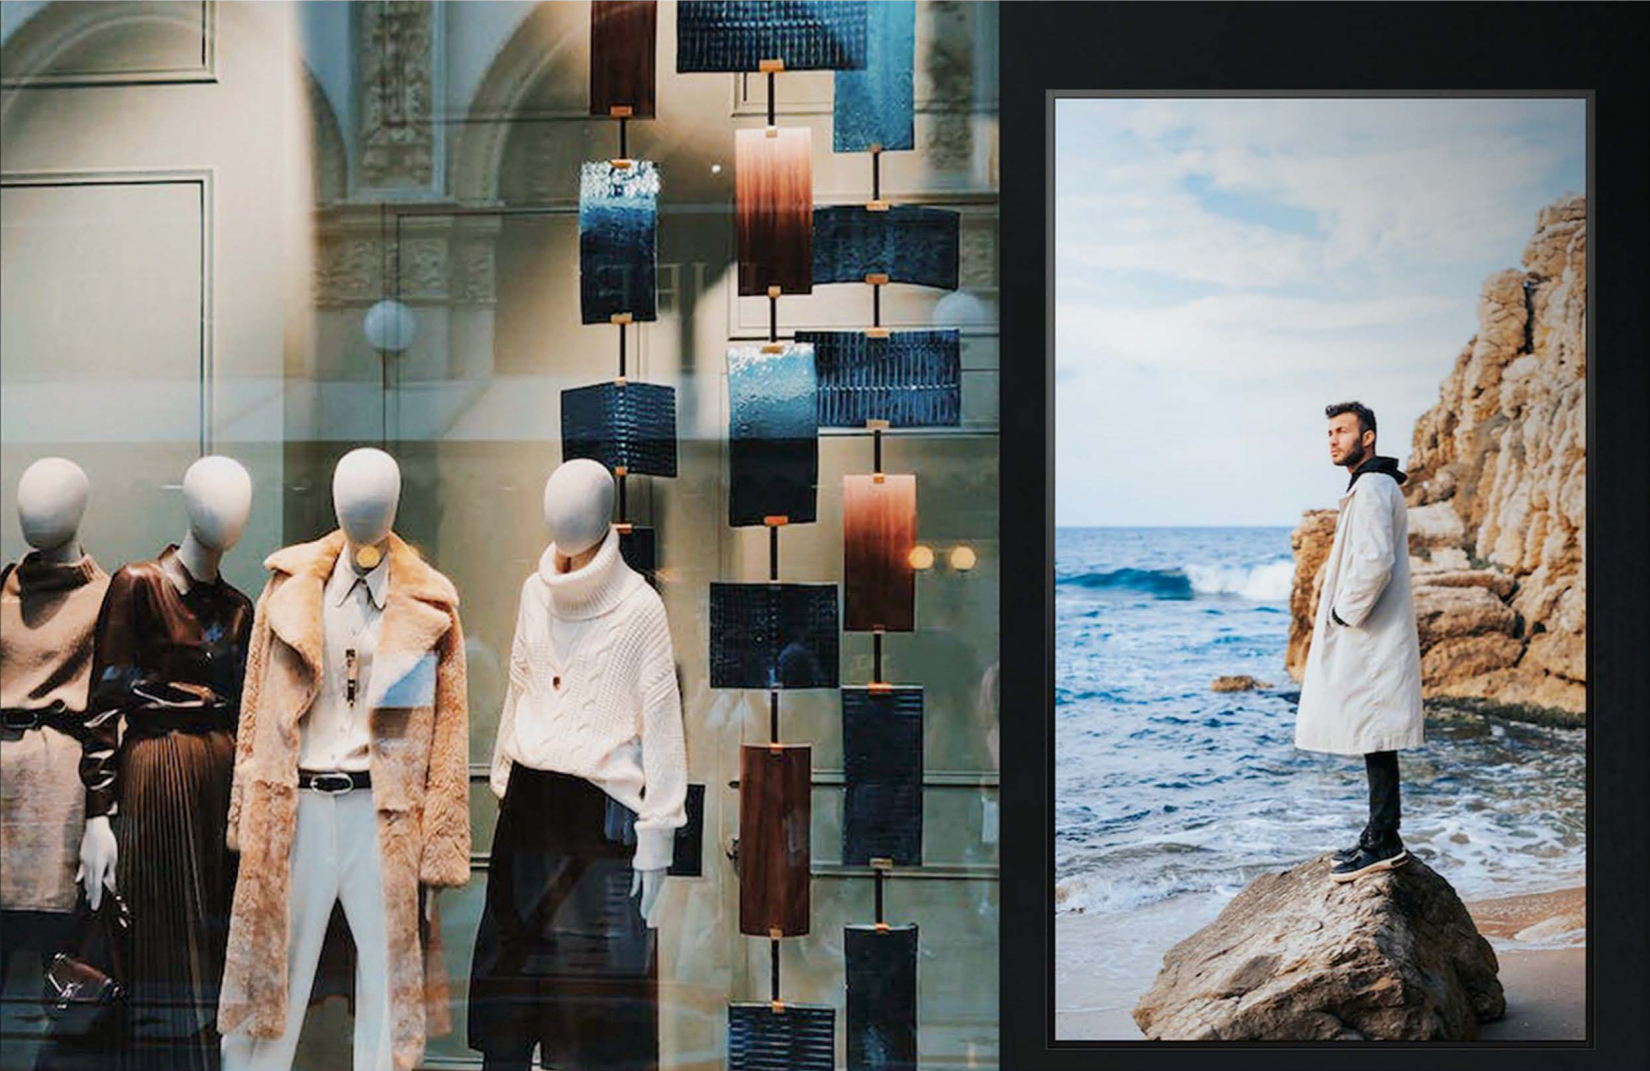

High Brightness Screen Series

Size : 55inch

Parameters

Model	M55SAR
Display	54.64 inches LED Backlight
Display Area (in)	47.62 x 26.79
Dimension (in)	48.57 x 27.73 x 3.70
Weight (lb)	GW 77.6, NW 62.2
Brightness	3500cd/m ²
Response Time	10
VESA	200 x 200 & 200 x 400
CPU	RK3288 GHz ARM Cortex-A1 7, Core Frequency 1.6 Ghz
Memory	2GB
Storage	8GB
OS	Android7.1
Speaker	2 x 2W 4Ω
Communication	USB, LAN, WAN
Resolution	3840 x 2160
Contrast Ratio	1300:1
View Angle	178°
Color Depth	10bit, 1.07 Billion Colors
Timing	Multiple time period scheduled power on/off
Orientation	Portrait, Landscape
CMS	SaaS CMS
Color	Black



Original IPS high-brightness commercial-grade screens

3500 nits brightness and high contrast screen, ensuring high color accuracy and picture quality restoration for commercial retail



Wide-temperature LCDs and intelligent temperature control cooling systems

Preventing screen black spots caused by direct sunlight and ensure precise display under strong light, intelligent temperature control for efficient cooling and stable operation



Built-in light adjustment system that adapts to external lighting

Adjusting display brightness based on changes in ambient light to save energy consumption



User-friendly design with built-in and external remote control devices

Significantly improving operational efficiency and allowing for convenient placement of controls, ensuring efficient maintenance with its enclosed design



Integrated Store Signage Cloud system

Easy and efficient remote centralized management of devices and program content, enabling automatic scheduled content switching



Supports both landscape and portrait installation

For various commercial retail scenarios, accommodating diverse and personalized spatial designs

Application Case





Media Player Series

Model: EP6A、EP66




EP6A



EP66

Parameters

Type	Model	EP6A	EP66
Board Configuration	OS	Android11	Android 7.1
	CPU	Rockchip 3328 Quad-core Cortex-A53 up to 1.5GHz	Rockchip RK3399
	GPU	Mali-450MP2	6 cores Cortex A72 x 2+A53 x 4 Core Frequency1.8GHz
	Memory	4GB	4 cores ARM Mali-T864
	Storage	32GB	4GB
Main Functions	Play Mode	USB, LAN transmission, WAN transmission	
	Wired Network	10M/100M/Ethernet adaptation	Ethernet x 1, RJ45, 100M/1000M
Network	Wireless Network	Wi-Fi x 1	Wi-Fi x 1, 2.4G&5G, 802.11b/g/n/ac
	HDMI	HDMI x 1	HDMI x 1, Maximum Support4K 60Hz
Board Interfaces	Power Supply Interface	DC x 1	DC x 1, 5.5 x 2.1/2.5mm FEMALE, 12V
	USB	USB2.0 x 2	USB 2.0 x 3,USB2.0 x 3,UBS3.0 x 1,Type-c x 1
	Audio Output	AUDIOOUT x 1	
	TF Card Holder	TF Cassette x 1	TF Cassette x 1, MicroSD, Maximum Support 128GB
	RTC	Multi period Time switch	RTC Real Time Clock
Other Functions	Watchdog	/	Built-in watchdog, automatic recovery from abnormalities
	Size (in)	L*W*H	4.00 x 4.00 x 0.80

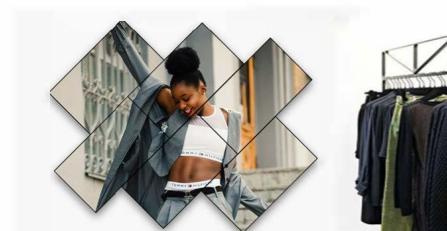

Alien Cloud Stitching

The built-in cloud splicing function supports up to 100 screens splicing at any angle, and special patterns can be easily done



Built-in CMS software

SaaS cloud service supports remote unified management, centralized remote control in the cloud, rapid release of materials on PC or mobile terminals, etc



Rich interface

The media player is equipped with rich interfaces, all round high-speed input and output



Intelligent split screen, multi-screen linkage

Supports multiple zones within the same screen to display different content, allowing users to allocate space for each content source more flexibly



4K/1080P HD color output


Built-in decoding, supports 4K or 1080P Full HD



Safe, reliable and easy to operate

The program is not afraid of tampering, two-way encryption to ensure the security of broadcast information


Application Case

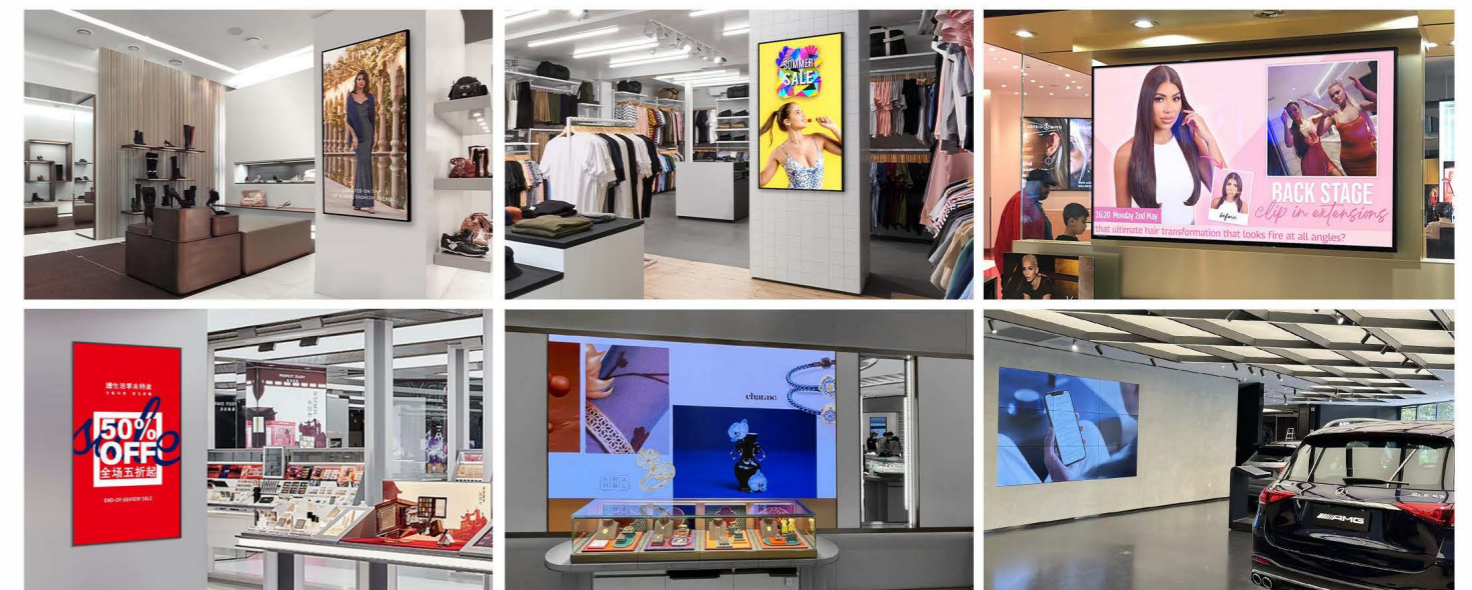



Digital Frame series

Size: 27 inch

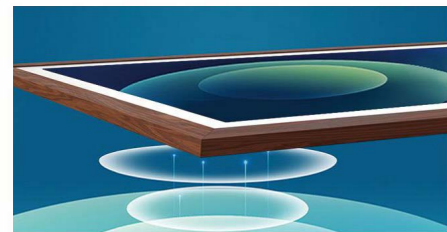

Technology sense magnetic suction power supply

Innovative magnetic suction technology, safe and reliable. New intelligent chip to stabilize power supply current and enhance power supply stability



Photo Cloud Sharing

Use APP to break the space constraint, share beautiful images and share life anytime, anywhere



HD anti-glare paper-like screen technology

The perfect vision, what you see is extraordinary. The use of paper-like screen technology, anti-glare, clear picture quality, more colorful and textured



Vintage original wood picture frames

Selection of environmentally friendly logs, artistic appearance, hand-carved, crafted



Built-in famous paintings

Built-in rich famous paintings, paper visual experience, consistent with the effect of natural light reflecting on the paintings in the gallery



Built-in audio


Built-in audio, audio and video integration, immersive experience



Parameters

Model	A27HA1
Display	27 inches LED Backlight
Display Area (in)	23.54 x 13.24
Dimension (in)	28.00 x 17.70 x 1.34
Weight (lb)	GW 17.0, NW 11.9
Brightness	300cd/m ²
Resolution	1920X 1080
View Angle	89° (U/D/L/R)
Atomization degree	25% haze
Color gamut	72%
Speaker	Stereo 1.5W 8Ω*2
Orient-tion	Landscape/Portrait
OSD Language	Chinese
Play mode	Landscape, Portrait, Landscape and Portrait custom display orientation
Communication	LAN, WAN
CPU	UNI SOC UIS8S81 /8 Core Cortex A55
Memory	2GB
Storage	32GB
Response Time	14ms
Backlight life	30000Hrs
Watchdog	Support
Timing	Scheduled power on/off
VESA	100 x 100
Installation	Hanging Plate
Contrast Ratio	1000: 1
Color Depth	6bit, 16.7 Million colors
Accessories	Power adaptor x 1, M4*30 screws x 4, Double Sided Tape x 10, Gradienter x 1, Installation Paper x 1
Color	Pine wood, White Birch, Black Walnut

Application Case

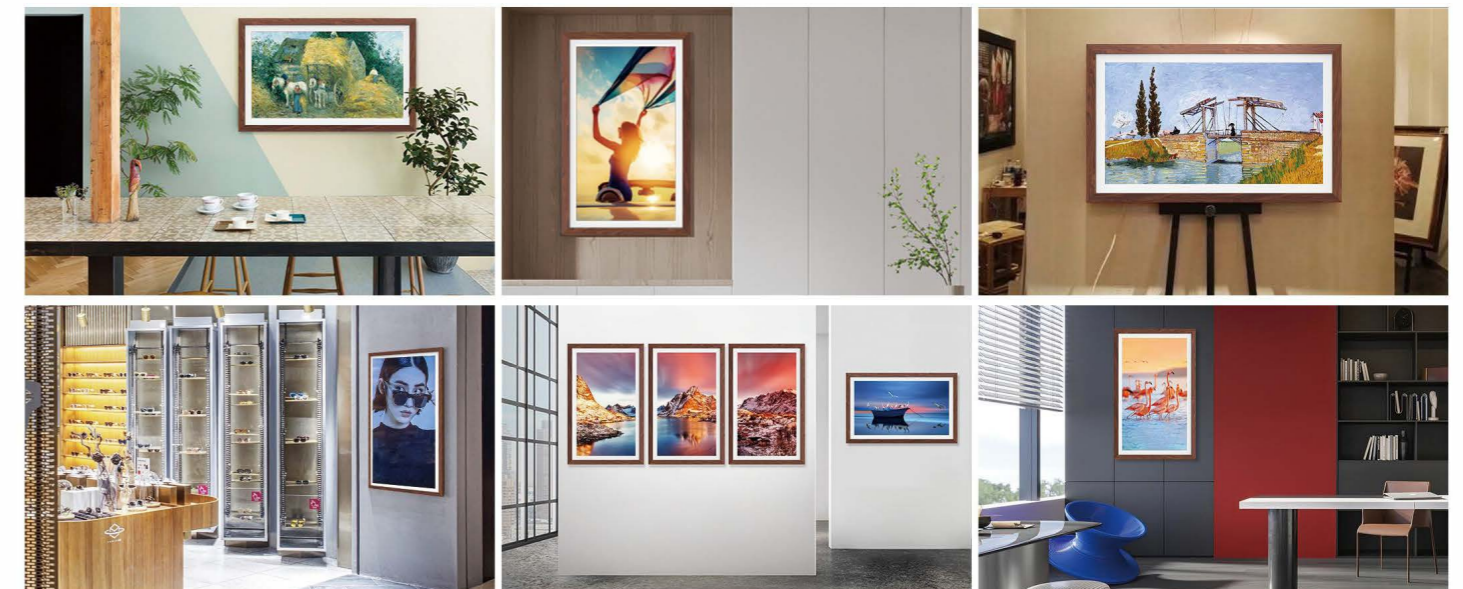



Comprehensive retail commercial display service provider

Good management

Easy to use

High efficiency

More reliable

Strong incoming traffic

Zero burden

Store Signage Cloud Service

Content


- Digital Signage Basic
- Digital Signage Pro
- Media Player
- Interactive Cloud Shelves

Hardware

- LED
- High Brightness Screen
- Moveable A-Frame
- Digital Frame

Cloud Platform

- SaaS
- OaaS

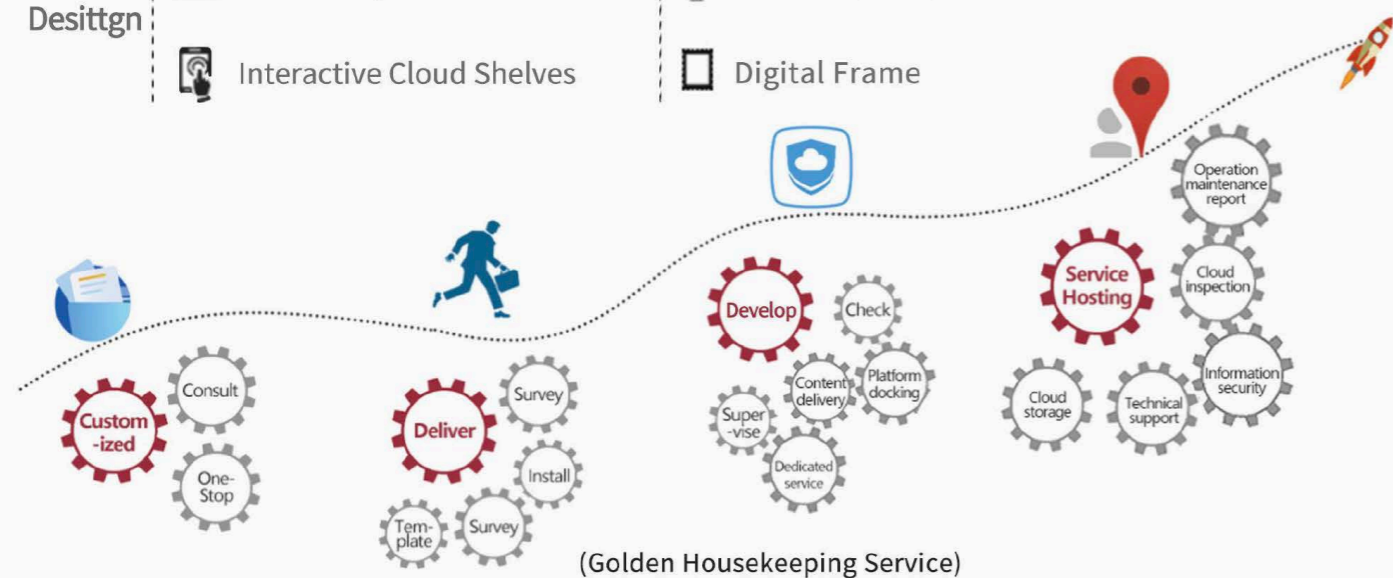

Application Scenario



Store Signage Cloud Service Package

SaaS Software Services

OaaS Operations and Maintenance Services

Rental Package Services



ARC | 833-272-8880 | e-arc.com

ARC, ARC Document Solutions and the ARC logo are registered trademarks of ARC Document Solutions, LLC in the U.S. and/or other countries.